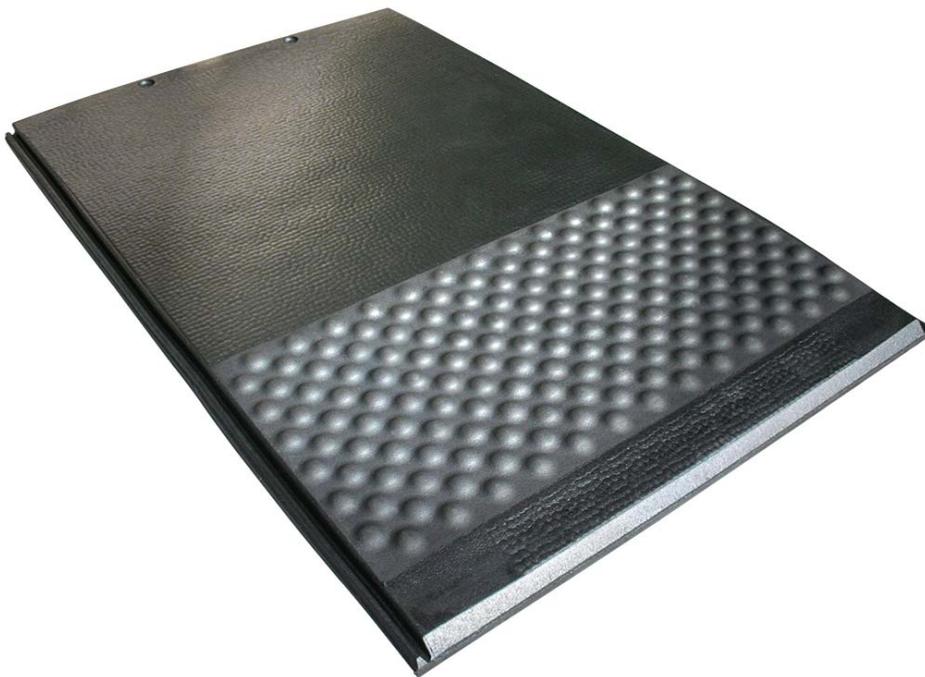


Your KRAIBURG dealer:


**NEW: Comfort zone lying mat with extra soft and pliant tarsal zone**

- optimal and permanent softness for every load condition
- the soft lying area within the mat edges supports the correct resting position of the cow
- proven 3-layer structure in the front section is gentle on carpal joints
- **specially designed tarsal zone in the rear third of the mat:**
- pliant air cushioned structure made of elastic ball shaped segments on the upper side
- pressure relief for sensitive tarsal joints when lying down
- better air circulation keeps the skin drier
- even small amounts of litter are held in place
- improved sure-footedness, especially when getting up and when leaving the cubicle
- integrated soft slope to rear edge promotes drying off

Significant litter savings compared to deep-litter cubicles. However, some litter is necessary to absorb moisture and increase animal welfare.

**System dimensions:**

**thickness:** approx. 60 mm

**width (adjustable with connecting bar) × length:**  
120/125/130 cm × 183 cm

**Installation:**

2 fixings / mat and 5 screws / profile\*

**Accessories:**

- **end-profile:** profile for closure at side edges, length: 183 cm, width: 63

**Gummiwerk KRAIBURG Elastik GmbH & Co. KG**

Göllstraße 8 • 84529 Tittmoning • Deutschland • Tel.: +49 8683 701-303 • Fax: +49 8683 701-190 • E-Mail: info@kraiburg-elastik.de • www.kraiburg-elastik.de

October 2018



system construction



cross-section and lower side at tarsal zone



sealing lips completely enclose the sub-construction

mm, installation: 5 framing plugs / profile

- **ergoBOARD** » - the flexible brisket board
- **maxiBOARD** » - the robust brisket board

\* Please take notice of the corresponding KRAIBURG specifications and installation instructions with useful advice and tips.

>The products presented here should only be used for the mentioned applications. Technical specifications are subject to alterations. All sales are subject to our General Terms and Conditions. Legal basis is the German version of the document.



connecting bar engages flush with the surface and facilitates professional installation



spoils your cows and moderately holds the litter, but can still be cleaned easily

**Tolerances:**

**thickness:**

+3/-2 mm

The tolerances also apply within the mat and when installed.

**length + width:**

+/- 1.5 % (DIN ISO 3302-1 tolerance class M4)